

# ZWAY HDMI- KVM

## Appearance



**KHU-0401**




**KHU-0801**

## Feature

- ⊙ No need to install any software, support control computer by hot key/ button/ remote control.
- ⊙ USB port KVM switch.
- ⊙ LED light shows work status.
- ⊙ Support add or remove units over plug and play without shut off the switch.
- ⊙ Apply to DVR, ect.

# Connection Diagram

(Take KHU-0401 for example)

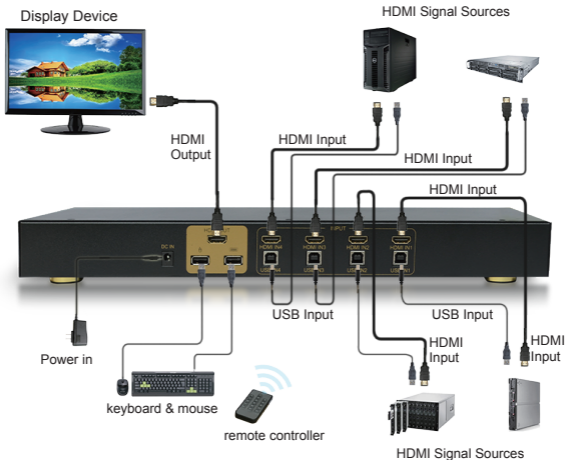

## Use Manual

- © Make sure all cables are properly connected before turning.
- © Please unplug when clean-up or long time no use.
- © Please use the product-specific power adapter and use in the range of the adapter marked.
- © Working Temperature: 1-40 °C, Humidity: ≤85%

## Maintenance instructions:

- © Do not put any heavy objects on the device, connect the device placed in secure places.
- © Do not block the ventilation holes, place the device in a dry and ventilated place.
- © Do not place the product in hot, cold, humid or dusty place used or stored.

# Operation


1. Connect signal source , display device, keyboard and mouse correctly.
2. Switch method: directly switch by switch button or Hot Key.

Hot Key :

- 1.Double Click Scroll Lock into Control state, at the same time, the switch make two sounds "di...di..."
- 2.Input hot key order within 3 seconds.



Note: default scan time is 6 seconds, users can adjust scan time according to the demands. Methods:



Increase or decrease time unit is 1 second for one time, support unlimited increase.



Note: number keys are small key pads. 4 ports switch is 1-4 keypad.



## Performance Parameter

Output Interface	HDMI Video port,USB keyboard mouse port
Input Interface	4/8 way HDMI video port,4/8 way USB port
Switch way	Button swich, hot key, remot control switch
Keyboard mouse	USB port
Automatic scanning interval	6 seconds (settable)
Resolution	1920*1440 or 1080P
Bandwidth	2.55GHZ
Power	DC 9V
Shell	Metal
Size	430*118*45mm
Net Weight	4port KVM 1.2KG                      8port KVM 1.4KG

## Packing List

NO.	Name	Qty	Remark
1	HDMI port KVM switch	1PC	
2	Remote control	1PC	
3	Power adapter	1PC	
4	User manual	1PC	
5	Warranty card	1PC	
6	Rack	2PC	