


Model Name: ATS

Model Number: ATS-3011M-10N2



Input

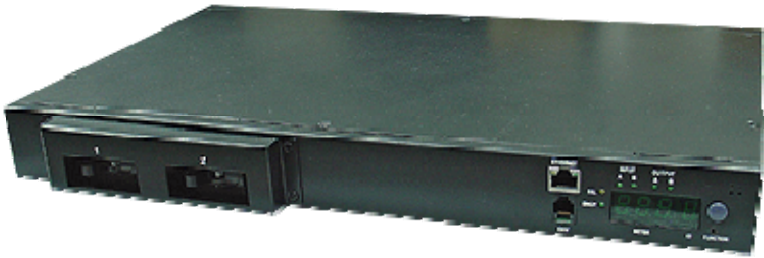

Description

115V, 30A, 10 Outlets, Dual Input, Redundant Power Protection, Remote kWh / Voltage Monitoring

Features

- Meter** True RMS Current Meter, Voltage, Frequency, Power Factor, Active Power, Apparent Power, Total kWh, Sub-total kWh.
- Power Monitor** Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software
- Protocols** Http, Https, SNMP, DHCP, UDP
- Alarm Thresholds** User-Defined Alarm Thresholds for Warning and Overload
- Event Alert** Email, Trap, Audible Alarm
- Temp./Humidity** Option Accessory
- Power Action** Automatic Transfer Switch
- Protection** Circuit Breaker



Specification

General

Output	(10) NEMA 5-15/20R
Input	(2) attached NEMA L5-30 plugs, 3 meters
Output Protection	(2) 20 AMP Circuit Breaker

Communication

SSL Indication	(1) Yellow LED
DHCP Indication	(1) Green LED
Output Status	(2) Green LED
Input Status	(2) Green LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
Identification	1 Digits Seven Segments for Identification
Meter	3 Digits Seven Segments

Power Information

Voltage	+/- 2% @ 90V~260V
Active Power	+/- 2% @ 50W~5000W
Apparent Power	+/- 2% @ 50VA~5000VA
Frequency	+/- 2% @ 45~65Hz
Power Factor	+/- 0.02 @ 0.5~1.0
kWh	Range: 0.001kWh ~ 99999.999kWh Precision: +/-2% @ 50W~5000W, kh=1.0
Current	Range: 0A ~ 32 A Resolution: 0.1A Precision: +/-2% +/-0.1AMP

Operation

Nominal Voltage	110V ~130V
On-Line Voltage	100V~ 143V
Frequency	50/60Hz
Max. Output Current	30 Amp
Transfer Time	8~16ms
Operation Temp.	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	260 x 432 x 44.45 mm
Net Weight	7 kg

Regulatory Approvals

CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
FCC Part 15 Class A, ICES-003



