

Model Name: kWh PDU
Model Number: WSH-1511A-08N1



Input




Description

115V, 15A, 8 Outlets, Remote Power Switch, Remote kWh / Voltage Monitoring

Features

- Meter** True RMS Current Meter, Voltage, Frequency, Power Factor, Active Power, Apparent Power, Total kWh, Sub-total kWh.
- Power Monitor** **Total Power Monitoring by** Meter, Web, SNMP, Free Bundle Software
- Protocols** Http, Https, SNMP, DHCP, UDP
- Outlet Control** Individual, Group, Schedule, Auto Ping
- Power Delay** Power On/Off Sequence can be Defined
- Alarm Thresholds** User-Defined Alarm Thresholds for Warning and Overload
- Event Alert** Email, Trap, Audible Alarm
- Temp./Humidity** Option Accessory

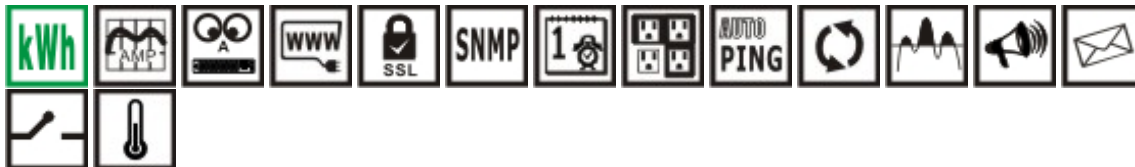

Specification

| General | |
|---------|---|
| Output | (8) NEMA 5-15/20R |
| Input | (1) IEC320 C20 Inlet; Enclosed IEC320 C19 to NEMA 5-15P Power Cord 3 Meters long |

Protection (1) 15 AMP Circuit Breaker

Communication

SSL Indication (1) Yellow LED
DHCP Indication (1) Green LED
Output Status (8) Green LED
Circuit Status (1) Red LED
Network (1) RJ45 for Ethernet
Temp./Humidity (1) RJ11 for ENV probe connection
PDU ID 1 Digits Seven Segments for PDU Identification
Meter 3 Digits Seven Segments

Power Information

Voltage +/- 2% @ 90V~290V
Active Power +/- 2% @ 50W~5000W
Apparent Power +/- 2% @ 50VA~5000VA
Frequency +/- 2% @ 45~65Hz
Power Factor +/- 0.02 @ 0.5~1.0
kWh Range: 0.001kWh ~ 99999.999kWh
Precision: +/-2% @ 50W~5000W, kh=1.0
Current Range: 0A ~ 20 A
Resolution: 0.1A
Precision: +/-2%+/-0.1AMP

Operation

Nominal Input Voltage 115V
Output Voltage 100V~ 127V full range
Frequency 50/60HZ full range
Max. Output Current 15 Amp
Temperature 0 ~ 40 Celsius degree
Humidity 0% ~ 90%
Size 125 x 432 x 44 mm
Net Weight 2.5 kg

Regulatory Approvals

CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
FCC Part 15 Class A, ICES-003

