


kWh PDU



Complete Power Information
Complete Power Control

Web Interface

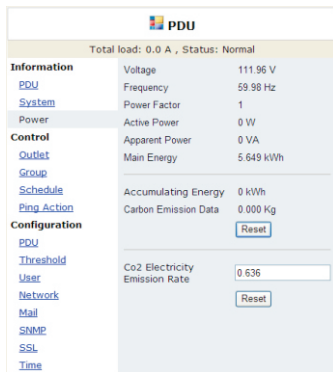

Monitor Information Management Control Notification Management

POM series



Switched series



Monitored series



PDU Central Management Utility




Main Energy



Humidity



Temperature



Current



Voltage

Active Power

Apparent Power

Power Factor

Frequency

kWh PDU

Complete Power Information
Complete Power Control

Specification

	POM PDU WDH-1623K- 08N8	Switched PDU WSH-1623K- 08N8	Monitored PDU WMH-1623K- 08N8	POM PDU WHH-1511A- 08N8	Switched PDU WSH-1511A- 08N8	Monitored PDU WMH-1511A- 08N8
Total Power Monitoring	Yes	Yes	Yes	Yes	Yes	Yes
Each Outlet Control	Yes	Yes		Yes	Yes	
Each Outlet Current Monitoring	Yes			Yes		
General						
Output	(8) IEC320 C13			(8) NEMA 5-15/20R		
Input	(1) IEC320 C20 Inlet; IEC 320 C19 to C20 Power Cord, 3 meters			(1) IEC320 C20 Inlet; IEC320 C19 to NEMA 5-15P Power Cord 3 Meters		
Protection	(1) 16 AMP Circuit Breaker			(1) 15 AMP Circuit Breaker		
Communication						
SSL Indication	(1) Yellow LED					
DHCP Indication	(1) Green LED					
Output Status	(8) Green LED		n/a	(8) Green LED		n/a
Circuit Status	(8) Red LED		(1) Red LED	(8) Red LED		(1) Red LED
Network	(1) RJ45 for Ethernet					
Temp./Humidity	(1) RJ11 for ENV probe connection					
PDU ID	1 Digits Seven Segments for PDU Identification					
Meter	3 Digits Seven Segments					
Power Information						
Voltage	+/- 2% @ 90V~260V					
Active Power	+/- 2% @ 50W~5000W					
Apparent Power	+/- 2% @ 50VA~5000VA					
Frequency	+/- 2% @ 45~65Hz					
Power Factor	+/- 0.02 @ 0.5~1.0					
kWh	Range: 0.001kWh ~ 99999.999kWh ; Precision: +/-2% @ 50W~5000W, kh=1.0					
Current	Range: 0A ~ 20 A ; Resolution: 0.1A ; Precision: +/-2%/+/-0.1AMP					
Operation						
Nominal Input V	230V			115V		
Output Voltage	200V~ 240V			100V~ 127V		
Frequency	50/60HZ full range					
Max. Output Current	16 Amp			15 Amp		
Temperature	0 ~ 40 Celsius degree					
Humidity	0% ~ 90%					
Size (mm)	215 x 432 x 44.45	125 x 432 x 44		215 x 432 x 44.45		125 x 432 x 44
Net Weight (kg)	4.5	2.5		4.5		2.5